


# **AVT** Ninja 400 NI Fender Eliminator Install Guide

---

1) Remove the seat with your motorcycle key.

---

2) Flip up the tray under the seat to expose the wiring for the fender (you may wish to remove the tray held by two clips and pins for more room). 1) Under the black hood are three plugs you need to unplug. A smaller square gray and black plug and a larger rectangular black plug. 2) Remove the (4) #5 hex bolts holding the fender and lower it out of the way.

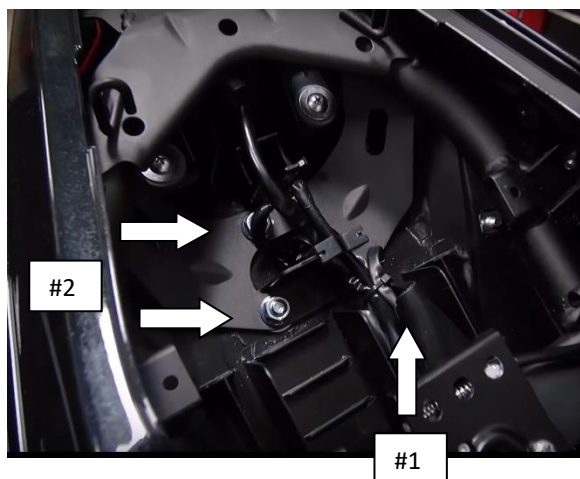

3) Install your new fender eliminator into the OEM location and secure it with the (4) OEM hex bolts and the nuts provided.

---

4) Connect the electric connectors: 1) white rectangular plug to black rectangular plug.

2) orange plug to black plug 3) light blue plug to gray plug.

---

6) Reinstall the rest of the components in reverse order:

- 1: Seat
  - 2: License plate
- 

**Congratulations on successfully installing your New Ninja AVT 400 NI Fender Eliminator!**

Thank you for your order, AVT.



[www.avt-innovations.com](http://www.avt-innovations.com)