



# **AVT** GS Luggage Rack Install Guide

1) Remove the (4) OEM bolts.

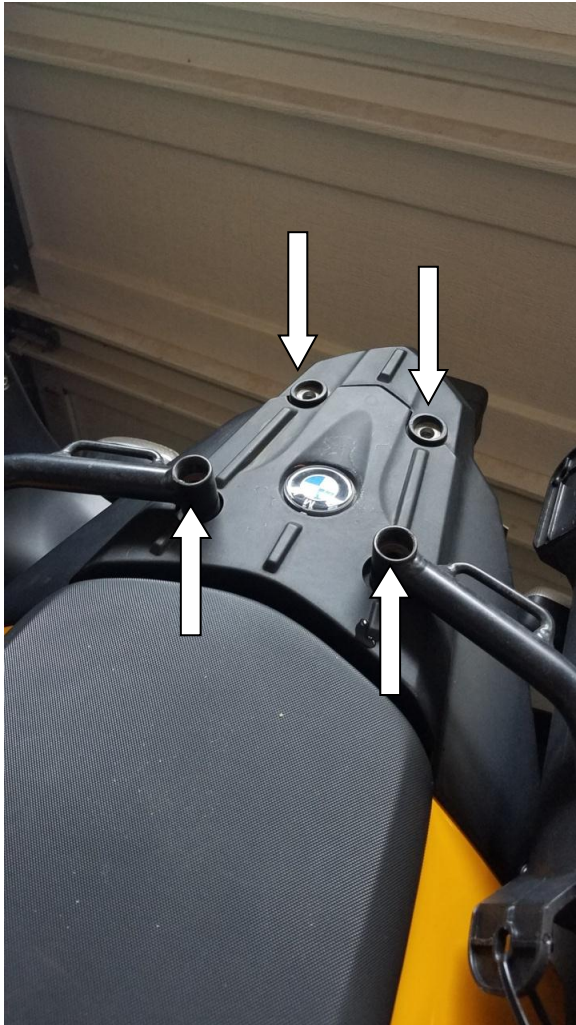

2) Position the (2) spacers provided over the rear holes and position the rack into place and

align all of the openings.

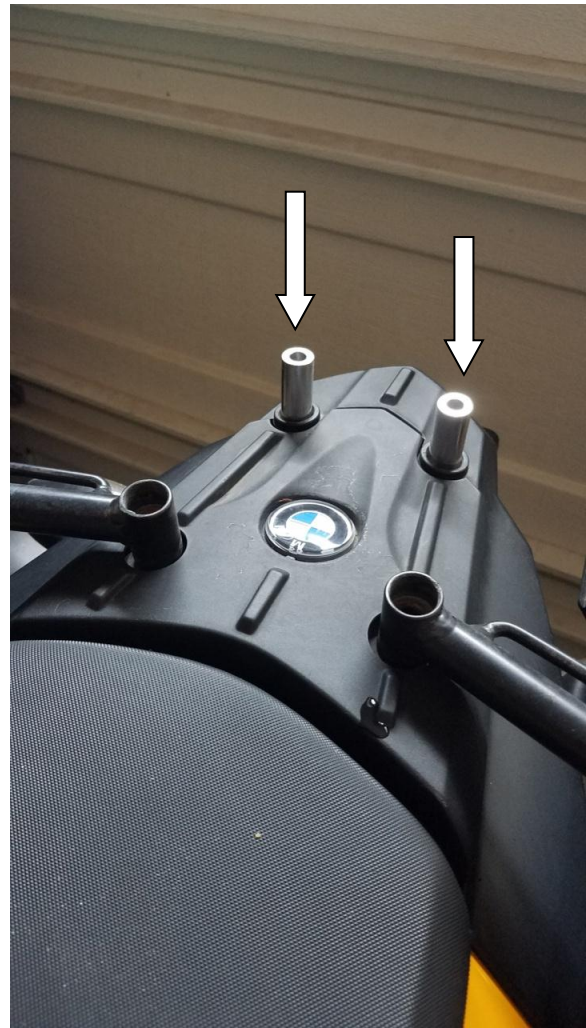

3) Bolt down the rack with the (4) T5 bolts provided.

**Congratulations on successfully installing your New AVT GS Luggage Rack!**

Thank you for your order, AVT.



[www.avt-innovations.com](http://www.avt-innovations.com)